

UQK-652-C/Z

自检式船用浮球液位控制器

MARINE FLOATING BALL LIQUID LEVEL CONTROLLER

使用说明书

INSTRUCTION MANUAL

辽阳双华仪表有限公司

LIAOYANG SHUANGHUA INSTRUMENT Co.,Ltd

● UQK-652-C-Z 型船用浮球液位控制器 MARINE FLOATLEVEL CONTOLLER

UQK-652-C 系列顶装式船用浮球液位控制器适用于舰船敞开容器内液位控制。当液位处于高位或低位时，浮球开关动作，发出报警信号。

UQK-652-C-Z 是在 UQK-652-C 的基础之上增加了自检功能，即自检式船用浮球液位控制器。它可以在设备运行状态下，搬动操作手柄，对控制器及系统进行检测，以确保控制器及系统安全运行。


UQK-652-C series top mounting type of marine float level controller is used for the level Control in the opening or pressure container of ship .When the level is high or low the float switch Works and alarms.

UQK-652-C-Z is added self-check function on the basis of UQK-652-C,namely Self-check Marine Float Level Controller,which can be moved the operating handle to detect the Controller and system under the state of equipment working in order to assure the controller and System operate safely .

● 技术参数 TECHNICAL SPECIFICATION


控制范围 L Controlling range	200~2000mm
工作温度 Working temp	-20~120℃
工作压力 Working pressure	1.6MPa
介质密度 Medium density	≥0.6g/cm ³
触点容量 Contact capacity	220V AC/DC 1A
电缆出口 Cable exit	Φ11
材 质 Material	304S
浮球直径 D (mm) Float dia.	Φ52 Φ45 Φ28
保护管直径 (mm) Protected pipe dia	Φ89
防护等级 Protection	IP66 or IP68

● 型号标记 MODEL SIGN

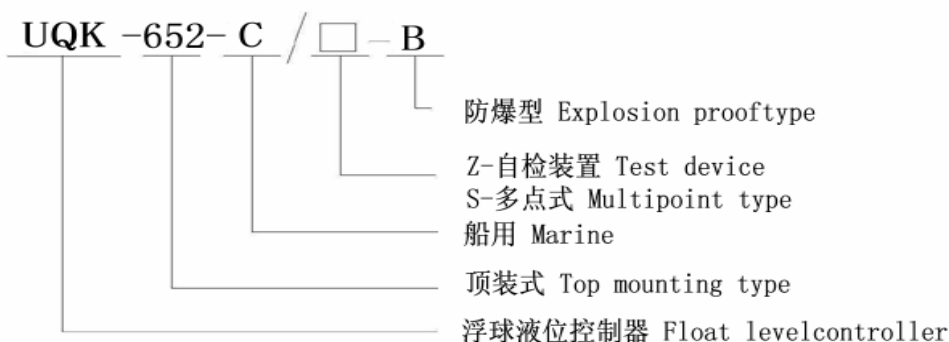

Matters needing attention: UQK-652-C-Z goes against installs the self-checking type ship with the float fluid position controller, when examination promotes the handle 20~30mm (refer to figure) to cause upwardly the examination organization movement, the switch to report to the police achieved the examination the goal, after the examination pays attention the handle repositions.

● 接线图 WIRING DIAGRAM

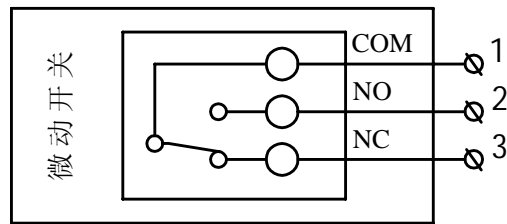


微动开关原理图

● 订货须知 ORDER GUIDE

型号、名称、测量范围，被测介子压力、温度和比重。
如有特殊要求按订货协议。

When you place an order please specify the type the name, the measure scope, the pressure, the temperature and the specify gravity of the agent.

If you have a special requirement, we will accord with the order's agreement.

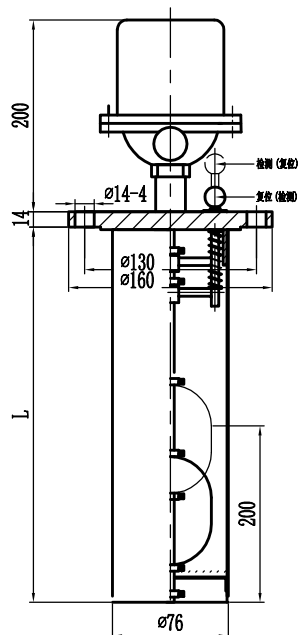

UQK-652-C-Z

注意事项: UQK-652-C-Z顶装自检式船用浮球液位控制器, 在检测时将手柄向上提升20~30mm(见图), 使检测机构动作, 开关报警达到检测的目的, 检测后注意将手柄复位。

辽阳双华仪表有限公司

地址：辽阳市太子河区荣兴路中段 122 号

电话：+86（419）4154068 4153466

传真：+86（419）4153422

邮编：111000

网址：www.lyshyb.com

邮箱：lyshyb@lyshyb.com

LIAOYANG SHUANGHUA INSTRUMENT Co.,Ltd

Address:No.122 Middle Rongxing Road,Taizi River District,Liaoyang City

Tel: +86（419）4154068 4153466

Fax: +86（419）4153422

Zip : 111000

Http: www.lyshyb.com

Emil: lyshyb@lyshyb.com